


[Apr-2016 Dumps Training PassLeader New 400-351 135q VCE and PDF Dumps To Pass Exam

New Updated 400-351 Exam Questions from PassLeader 400-351 PDF dumps! Welcome to download the newest PassLeader 400-351 VCE dumps: <http://www.passleader.com/400-351.html> (135 Q&As) Keywords: 400-351 exam dumps, 400-351 exam questions, 400-351 VCE dumps, 400-351 PDF dumps, 400-351 practice tests, 400-351 study guide, 400-351 braindumps, CCIE Wireless Written Exam, v3.0 NEW QUESTION 1 Refer to the exhibit, based upon the given configuration which two statement are true? (Choose two)

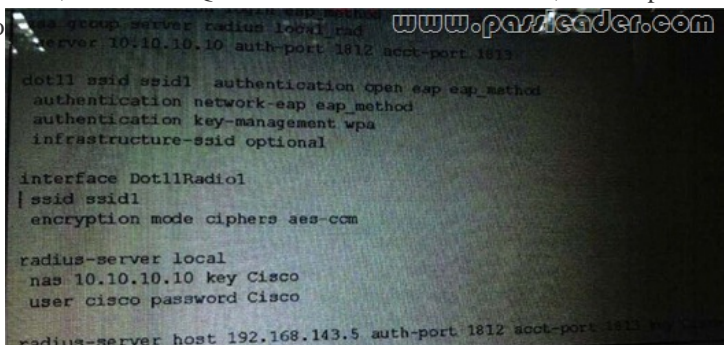

```
radius-server radius local rad
server 10.10.10.10 auth-port 1812 acct-port 1813


dot11 ssid ssid1 authentication open eap eap_method
authentication network-eap eap_method
authentication key-management wpa
infrastructure-ssid optional

interface Dot11Radio1
| ssid ssid1
 encryption mode ciphers aes-ccm

radius-server local
nas 10.10.10.10 key Cisco
user cisco password Cisco

radius-server host 192.168.143.5 auth-port 1812 acct-port 1813
```

A. local RADIUS server is used
B. No password is required everyone can join wireless network
C. Users will be required to provide a username and password for authentication
D. User will be required to provide a password only order to get access
E. Remote RADIUS servers is used
Answer: AC NEW QUESTION 2 Which two features require Network Time Protocol synchronization on the Cisco 5760 WLC? (Choose two)
A. AP CAPWAP multicast
B. SNMPv3
C. AP authentication
D. Band Select
Answer: BC NEW QUESTION 3 Refer the exhibit, the created dynamic interfaces are bound to an interface group for a specific WLAN profile in a Cisco Wireless LAN Controller. You have noticed duplicated multicast streams on the wireless medium for the given WLAN profile. Which statement is correct?

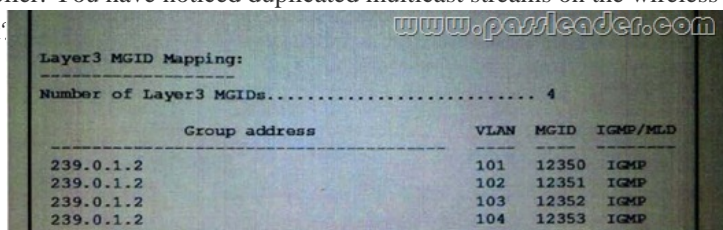


Group address	VLAN	MGID	IGMP/MLD
239.0.1.2	101	12350	IGMP
239.0.1.2	102	12351	IGMP
239.0.1.2	103	12352	IGMP
239.0.1.2	104	12353	IGMP

A. Global multicast mode, global IPv6 config, and multicast listener discovery snooping have not been enabled. Enable this to avoid duplicate streams.
B. Global multicast mode and internet group management protocol snooping have not been enabled. To avoid stream enable both.
C. The controller creates different multicast groups IDs for each multicast address and VLAN and as a result the upstream router sends one copy for each VLAN. Enable Multicast VLAN to avoid duplicate streams.
D. The controller always uses layer 3 multicast group 10 for all layer 3 multicast traffic sent to the access point internet group management protocol snooping should be disabled to avoid duplicate streams.
Answer: C NEW QUESTION 4 Refer to the exhibit the autonomous AP has a corporate and guest SSID configured. The security team requested that you limit guest user traffic to DHCP, DNS, and web browsing on the AP. Which configuration best satisfies the request?




A. access-list 101 permit udp any any eq 67
access-list 101 permit udp 10.28.128.0 0.0.0.255 host 10.28.10.15 eq 53
access-list 101 permit tcp 10.28.128.0 0.0.0.255 any eq 80
access-list 101 deny ip any any
interface dot11radio 0 ip access-group 101 in
B. access-list 101 permit udp any any eq 67
access-list 101 permit udp 10.28.128.0 0.255.255.255 host 10.28.10.15 eq 53
access-list 101 permit tcp 10.28.128.0 0.255.255.255 any eq 80
access-list 101 deny ip any any
interface dot11radio 0 ip access-group 101 in
C. access-list 101 permit udp any any eq 67
access-list 101 permit udp 10.28.128.0 0.0.0.255 host 10.28.10.15 eq 53
access-list 101 permit tcp 10.28.128.0 0.0.0.255 any eq 80
access-list 101 deny ip any any
interface fastEthernet 0 ip access-group 101 in
D. access-list 101 permit udp any any eq 67
access-list 101 permit udp 10.28.128.0 0.255.255.255 host 10.28.10.15 eq 53
access-list 101

permit tcp 10.28.128 0.255.255.255 any eq 80 access-list 101 deny ip any any interface fast Ethernet 0 ip access-group 101 in
Answer: C NEW QUESTION 5 Refer to the exhibit. The network operations center is using PI to collect and monitor the AVC data from a Cisco WLC. However no AVC information is showing up in Cisco PI. Based on this information from the Cisco WLC reason that Cisco PI is not showing the information is True.



A. Cisco prime does not have the correct licensing installed B. The monitor-name and exporter-name do not match C. The Exporter-IP should be the IP address of the Cisco WLC D. The port number should be 9991
Answer: D NEW QUESTION 6 Which two statements about LAG in the Cisco wireless LAN controller running Aire OS 8.0 are true? (Choose two)
A. LAG bundles all of the Cisco WLC distribution system ports into a single 802.3ad port channel B. There can be only one AP-manager interface if LAG is enabled C. LAG configuration changes take effect immediately after they are configured D. Channel negotiation LACP and PAgP are supported
Answer: AB NEW QUESTION 7 You have configured video stream on a Cisco WLC and users are now viewing the company video broadcast over the wireless network, how can you verify you have video stream configured and working in the Cisco WLC GUI?
A. The multicast status shows "normal multicast" in the multicast group detail B. The multicast status shows "MediaStream allowed" in the multicast group detail C. The WMM state shows "Enabled" in the clients detail D. The multicast status shows "multicast-direct allowed" in the multicast group detail
Answer: D NEW QUESTION 8 Refer to the exhibit. APs on VLAN 2100 can get IP address but cannot register to the WLC. The IP address of the WLC management interface is 24.244.4.227. Which option is the correct DHCP option 43 configuration?



A. f10412f41cd9 B. f10418f404227 C. f10818f41cd0a181cf4a01cd D. f10418f404e3e E. f1040a3f0701
Answer: D NEW QUESTION 9 Which two statements describe characteristics of high availability Cisco 5760 wireless LAN controller that uses the stackwise-480 technology? (Choose two)
A. A switch stack has only three WLCs one active WLC and two standby WLCs B. If the WLC becomes unavailable the standby assumes the role of the active and continues to keep the stack operational C. A switch stack has only two WLCs both WLCs are in active/active mode D. A switch stack has only two WLCs one active and one standby WLC
Answer: BD NEW QUESTION 10 Which option in the Cisco Identity Service Engine allows for authorization based on Active Directory user and domain computer login?
A. Machine access restriction B. Active directory group C. Active directory attributes D. Identity source sequences
Answer: A NEW QUESTION 11 Download the newest PassLeader 400-351 dumps from [passleader.com](http://www.passleader.com) now! 100% Pass Guarantee! 400-351 PDF dumps & 400-351 VCE dumps:
<http://www.passleader.com/400-351.html> (135 Q&As)