


## CCNP ROUTE(642-902) Lab &ndash; IPv6 OSPF Virtual Link

Acme is a small export company that has an existing enterprise network that is running IPv6 OSPFv3. Currently OSPF is configured on all routers. However, R4's loopback address (FEC0:4:4) cannot be seen in R1's IPv6 routing table. You are tasked with identifying the cause of this fault and implementing the needed corrective actions that uses OSPF features and does no change the current area assignments. You will know that you have corrected the fault when R4's loopback address (FEC0:4:4) can be seen in the routing table of R1.

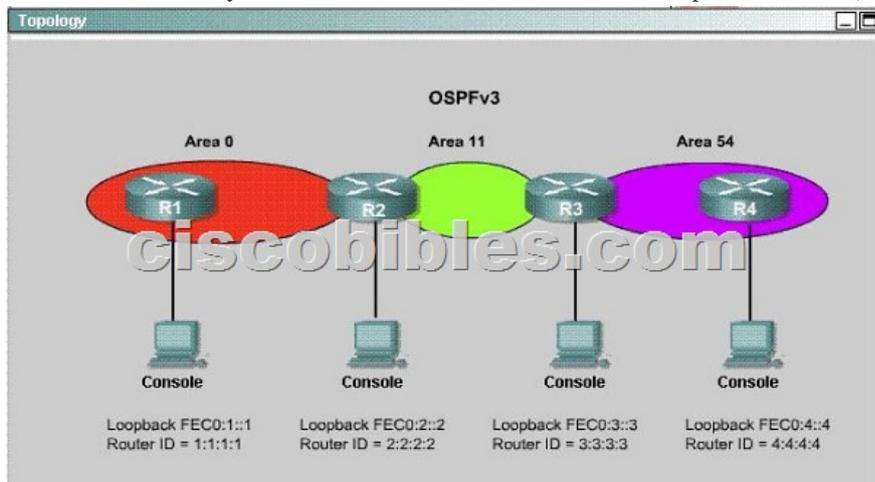

**Special Note:** To gain the maximum number of points you must remove all incorrect or unneeded configuration statements related to this issue. **Answer and Explanation:** To troubleshoot the problem, first issue the show running-config on all of 4 routers. Pay more attention to the outputs of routers R2 and R3 The output of the ?show running-config? command of R2:

```
<output omitted>
!
ipv6 router ospf 1
router-id 2.2.2.2
log-adjacency-changes
!
<output omitted>
```

The output of the ?show running-config? command of P4S-R3:

```
<output omitted>
!
ipv6 router ospf 1
router-id 3.3.3.3
log-adjacency-changes
area 54 virtual-link 4.4.4.4
!
<output omitted>
```

We knew that all areas in an Open Shortest Path First ([OSPF](#)) autonomous system must be physically connected to the backbone area (Area 0). In some cases, where this is not possible, we can use a virtual link to connect to the backbone through a non-backbone area. The area through which you configure the virtual link is known as a transit area. In this case, the area 11 will become the transit area. Therefore, routers R2 and R3 must be configured with the `area <area id> virtual-link <neighbor router-id>` command. + Configure virtual link on R2 (from the first output above, we learned that the [OSPF](#) process ID of R2 is 1): R2>enable R2#configure terminal R2(config)#ipv6 router ospf 1 R2(config-rtr)#area 11 virtual-link 3.3.3.3 (Notice that we have to use neighbor router-id 3.3.3.3, not R2's router-id 2.2.2.2) + Configure virtual link on R3 (from the second output above, we learned that the OSPF process ID of R3 is 1 and we have to disable the wrong configuration of ?area 54 virtual-link 4.4.4.4?): R3>enable R3#configure terminal R3(config)#ipv6 router ospf 1 R3(config-rtr)#no area 54 virtual-link 4.4.4.4 R3(config-rtr)#area 11 virtual-link 2.2.2.2 We should check the configuration on R4: R4>enable R4#show running-config You will see a wrongly configured virtual-link command. To get full mark we have to disable this command: R4#configure terminal R4(config)#ipv6 router ospf 1 R4(config-rtr)#no area 54 virtual-link 3.3.3.3 After finishing the configuration don't forget to ping between R1 and R4 to make sure they work well! Now all the configuration was done. It is weird that we can't ping the IPv6 loopback interface of R4 (with the ping or ping ipv6 command) but we can check by using the command show ipv6 route on R1 The **copying running-config startup-config** command will not work but don't worry, just skip it. Notice: If you issue

the command `?show running-config?` on R1, you will see these two lines: `passive-interface default` `no passive-interface fa0/0` (fa0/0 is the interface connecting with R2) These two lines make all the interfaces of R1 become passive interfaces except interface fa0/0. They are correctly configured so don't try to disable them.